


CFO SERIES - CF0141




SINGLEMODE 1CH VIDEO DUPLEX AUDIO/DATA/CC LINK

The CF0141 link provides transmission of 1 video channel uni-directionally and 2 data, 1 audio and 1 contact closure channel bi-directionally on 1 singlemode optical fibre at 1310nm for up to 50 km. The product utilises the latest uncompressed digital technology to provide very high performance zero-delay video and audio transmission and reliable error free data services. All common data protocols are supported and are easily selectable from the same unit. As with all CFO Platform products, the CF0141 unit meets all international EMC and environmental requirements.

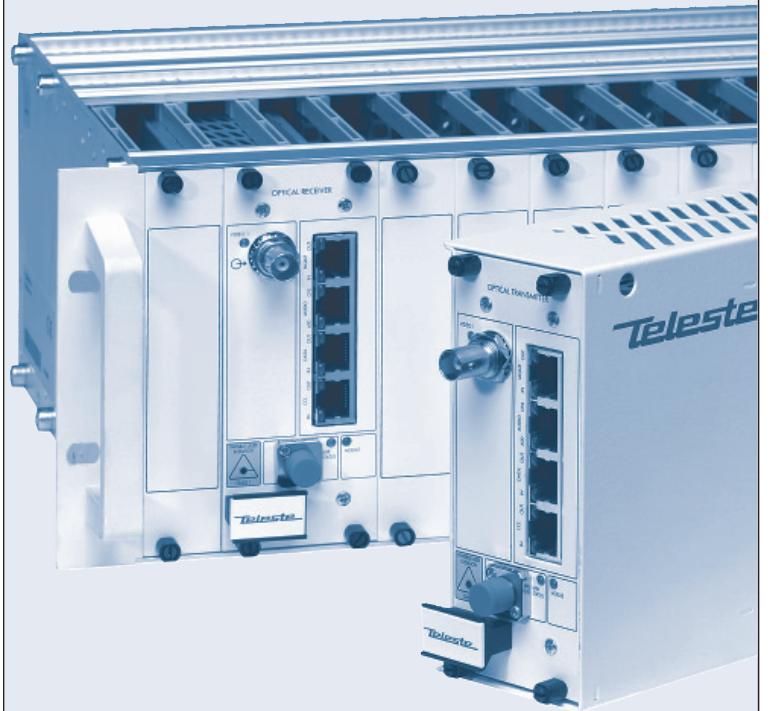

FEATURES AND BENEFITS

- High Performance Uncompressed Digital Video
- PAL/NTSC/CBVS Video Input
- Bi-directional Audio/Data/Contact Closure Transmission (CRT <--> CRR)
- Supports All Common Protocols in Same Unit
- Bi-directional on 1 Singlemode Fibre up to 50 km
- True Plug and Play - No Adjustments, Switches, etc.
- In-band Configuration and Management
- Same Units for Rackmount or Standalone
- Mechanically Compact and Ruggedised
- International EMC and Environmental Conformance
- Compatible with all CFO Installation Systems
- CE Approved

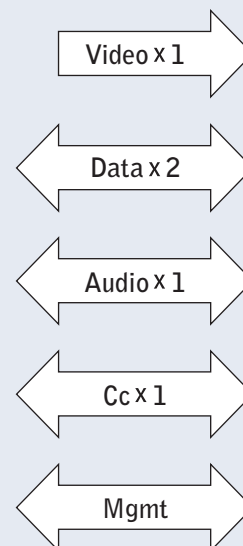


CFO FIRST MILE SERIES - CF0141
SINGLEMODE 1CH VIDEO, DUPLEX AUDIO/DATA/CC LINK



TECHNICAL SPECIFICATIONS (Typical values unless otherwise stated)

PARAMETER	VALUE	UNIT	COMMENTS	PARAMETER	VALUE	UNIT	COMMENTS
Optical				Data			
Output/Input Wavelength	1310	nm	FC/PC connector into 9/125 µm fibre	Number of Channels	2		bi-directional
Output Power	-1	dBm		Data 1 Format	RS232		non-selectable
Spectral Width	3	nm		Data Rate	0...120	kbps	
Received Power (Min)	-21	dBm	to meet specifications	Data 2 Formats	RS422/485/TTL		selectable
Received Power (Max)	-1	dBm	to meet specifications	Data Rate	0...160	kbps	
Link Budget	20	dB		Oversampling Rate	1.6	MHz	
Bit Rate (Forward)	540	Mbps	CRT to CRR	Data Jitter	10	%	at max data rate
Bit Rate (Return)	13.5	Mbps	CRR to CRT	Dwelltime Setting	50...10000	µs	RS485
Video				Contact Closure			
Number of Channels	1		uni-directional	Number of Channels	1		bi-directional
Sampling Frequency	27	MHz		Data Rate	5	Hz	
Sampling Resolution	8	bits		Latency	100	ms	
Source and Load Impedance	75	ohm		Management			
Return Loss	30	dB	0.1 MHz to 5.5 MHz	Type	command line interface (CLI)		
Input and Output Signal Levels	1	Vp-p		Protocol	VT100/102, ANSI		
Input Overload Level	1.5	Vp-p	DC component	Data Format	RS232		
Insertion Gain	± 10	%	1 V	Communication	CRT <-> CRR bi-directional		
Bandwidth	± 10	MHz	-3 dB	Electrical			
Line Time Distortion	1	%	25 µs Bar 'K' rating	Supply Voltage	10.5...14	V DC	regulated
Short Time Distortion	1	%	2T Pulse 'K' rating	Current Consumption (Max)	600	mA	steady state
Short Time Distortion	5	%	2T Pulse to Bar ratio	Mechanical			
C/L Crosstalk	0.2	%		Dimensions (H x W x D)	3U x 10HP x 190 mm		
Luminance Non Linearity	3.5	%		Weight	0.7 kg		
C/L Gain Inequality	3	%		Connectors			
C/L Delay Inequality	10	ns		Video	BNC female		
Differential Gain	2.5	%		Audio/Data/Management	RJ-45 female		
Differential Phase	1	°		Optical	FC/PC		
S/N Ratio	60	dB	unified, weighted	Environmental			
Audio				Operating Temperature	-10...+70 °C		
Number of Channels	1		bi-directional	Storage Temperature	-30...+70 °C		
Sampling Frequency	52	kHz		Humidity	0...95 % non condensing		
Sampling Resolution	16	bits		Vibration	EN 50130-5:1995		
Input Impedance	600/>10k	ohm	selectable	Damp Heat	BS2011 p2.1, test dB, 95%rh 25...40 °C		
Output Impedance	10	ohm		Damp Heat Cyclic Oper.	EN 50130-5-14		
Nominal Level	0	dBm		Cold Operational	EN 50130-5-10		
Clipping Level	+12	dBm		Electromagnetic Compatibility (EMC)			
Insertion Gain	± 1	dB	0 dBm	Emissions	EN 50081-1, EN 55022-B		
Frequency Response	0.02...20	kHz	3 dB, ref. 1 kHz	Susceptability	EN 50130-4, EN 50082-1		
Harmonic Distortion	0.1	%					
S/N Ratio	70	dBqp	CCIR weighted				

BLOCK DIAGRAM

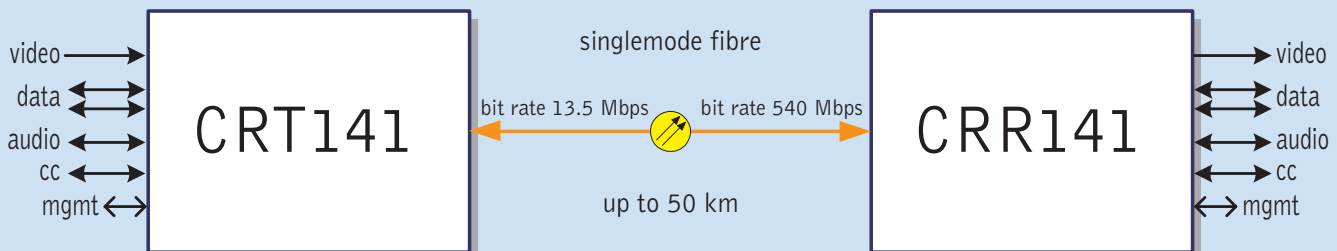

CONTACT OFFICES

TELESTE VIDEO NETWORKS

info.vn@teleste.com
www.teleste.com

Finland, Turku (Headquarters & Nordic)
UK, Cambridge (UK & International)
Germany, Bonn (EMEA HQ)
France, Magny le Hongre (France)
Belgium, Brussels (Benelux)
Spain, Madrid (Spain)
USA, Georgetown TX (Americas HQ)
USA, Murrieta CA (US West)
China, Shanghai (APAC HQ)

Tel. +358 2 2605 611 Fax. +358 2 2605 880
 Tel. +44 1223 505 111 Fax. +44 1223 518 370
 Tel. +49 7000 2288 366 Fax. +49 7000 2288 529
 Tel. +33 1 6463 3223 Fax. +33 1 6043 6710
 Tel. +32 2 7110 090 Fax. +32 2 7110 099
 Tel. +34 91 434 1840 Fax. +34 91 501 8090
 Tel. +1 512 868 2009 Fax. +1 512 868 8112
 Tel. +1 909 894 2297 Fax. +1 909 894 2298
 Tel. +86 21 6888 6212 Fax. +86 21 6888 6216

CF0141tib_v2
 11/2004