



Indoor RF passives

Galvanic Isolators **GIS-204C**

GIS isolators are used to galvanically isolate the coaxial access network from subscribers premises. They prevent problems caused by potential differences from occurring on sensitive devices like LCD and Plasma screens, VoIP and cable modems, when connected directly to system outlet. All the isolators withstand 2120VDC, 230VAC.

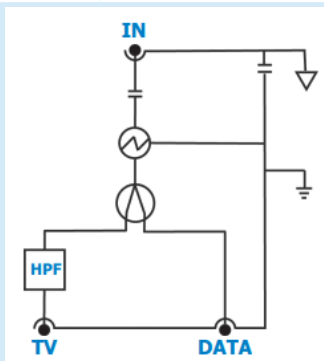
Features

- Frequency range up to 1218 MHz, Docsis 3.1 compliant
- Outstanding RF performance
- 100% HI-POT test in production
- Press-in sealing technology with Aluminum lid for corrosion protection
- Pull force in use <50kgs, Twist torque in use <50kgf.cm (5.1Nm)

One of Teleste's unique and award winning superior performance passives designed for easy installation and reliability.

TELESTE

INDOOR RF PASSIVES / GIS-204C

ELECTRICAL SPECIFICATIONS				
INSERTION LOSS (dB, Max.) - IN to TV		INSERTION LOSS (dB, Max.) - IN to DATA		
Frequency (MHz)	QA/TYP	Frequency (MHz)	QA/TYP	
85 - 205	5.0/3.8	5 - 14	4.2/3.2	
205 - 862	5.0/3.7	14 - 85	4.2/3.2	
862 - 1000	5.0/4.1	85 - 862	4.7/3.6	
1000 - 1218	5.1/4.3	862 - 1000	4.9/4.0	
		1000 - 1218	5.1/4.3	
RETURN LOSS (dB, Min.) - IN		RETURN LOSS (dB, Min.) - TV		
85 - 205	16.0/31.0	85 - 205	15.0/18.0	
205 - 1000	18.0/29.0	205 - 750	16.0/25.0	
1000 - 1218	18.0/23.0	750 - 1000	15.0/19.0	
		1000 - 1218	18.0/23.0	
RETURN LOSS (dB, Min.) - DATA		ISOLATION (dB, Min.) - TV to DATA		
5 - 14	20.0/24.0	5 - 65	45.0/73.0	
14 - 85	19.0/22.0	85 - 205	21.0/24.0	
85 - 862	19.0/30.0	205 - 450	20.0/24.0	
862 - 1000	20.0/34.0	450 - 1000	20.0/25.0	
1000 - 1218	19.0/25.0	1000 - 1218	21.0/24.0	
REJECTION LOSS (dB, Min.)				
Frequency (MHz)		QA/TYP		
5 - 64		45.0/56.0		
65		40.0/46.0		
GENERAL SPECIFICATIONS				
Frequency range (MHz)	5 - 1218 MHz		Nominal Impedance	75 Ohm
Operating temperature	-20 ° to +60 °C		Dimensions (L x W x D)	47.8 x 59 x 20 mm
Safety Isolation	2120 VDC	Inner conductor Input to Inner conductor Output Leakage current ≤ 0.7 mA, ≥ 1 minute Outer conductor Input to Outer conduct Output Leakage current ≤ 0.7 mA, ≥ 1 minute		
	230 VAC RMS, 50/60 Hz	Inner conductor Input to Inner conductor Output Leakage current ≤ 2.0 mA RMS Outer conductor Input to Outer conduct Output Leakage current ≤ 2.0 mA RMS		
Electromagnetic Compatibility ⁽¹⁾ (dB, Min.)		5 - 10 10 - 300 300 - 470 470 - 950 950 - 1218		65.0 85.0 80.0 75.0 65.0
NOTES				
(1) EMC, exceeding Class A acc. to IEC 60728-2				
ORDERING INFORMATION			BLOCK DIAGRAM	
GIS-204C 2-port Galvanic Isolator, 4 dB, DATA 5-1218 MHz, TV 85-1218MHz				

TELESTE

TELESTE CORPORATION
www.teleste.com

GIS-204C_20220131

Copyright © 2022 Teleste Corporation. All rights reserved. Teleste and the Teleste logo are registered trademarks of Teleste Corporation. Other product and service marks are property of their respective owners.

Teleste reserves the right to make changes to any features and specifications of the products without prior notice. Although the information in this document has been reproduced in good faith, the contents of this document are provided "as is". Teleste makes no warranties of any kind in relation to the accuracy, reliability or contents of this document, except as required by applicable law.