



FTTH Outlet Series - TEN-FW010

IN-HOME NETWORKS

enlighten **TEN-FW010** - FTTH Wall Outlet

This FTTH wall outlet is designed to hold up to 1 subscriber and is used as a termination point for the drop cable to connect with patchcable in FTTH indoor application. It integrates fiber splicing, termination, storage and cable connection in one solid protection box.

Features



- Small size and light weight
- Water-proof design
- Mounting Kit
- Easy to install and use
- Double-layer design for easier installation and maintenance
- Lock provided for extra security
- Cable entry from bottom or top



TELESTE

GENERAL			
Fiber cladding diameter	125 µm	Fiber diameter	250 µm, 900 µm
Supported adaptors	15C	Applicable mode	SM, MM
Material	ABS	Colour	White
Dimension (LxWxH)	100 x 79 x 22 mm	Weight	0,054 Kg
Operating temperature	-40 - +85 °C		

DETAILS

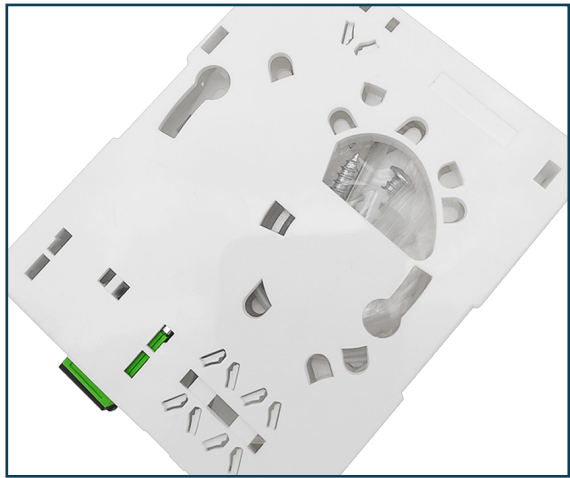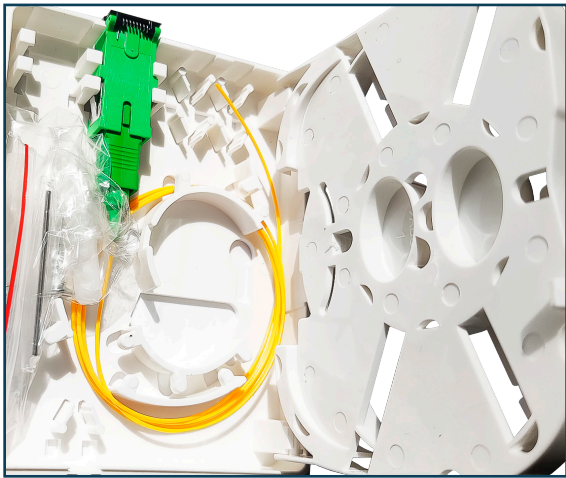

ORDERING INFORMATION

P/N	DESCRIPTION
TEN-FW010-0	FTTH Wall Outlet 10, without adaptors or pigtails
TEN-FW010-1SCAP	FTTH Wall Outlet 10, including 1 x SC/APC adapter and 1 x pigtail
TEN-FW010-2SCAP	FTTH Wall Outlet 10, including 2 x SC/APC adapters and 2 x pigtails

OPTION: Customer logo printing at the front on request



TELESTE CORPORATION
www.teleste.com

Enlighten TEN-FW010_20240228

Copyright © 2024 Teleste Corporation. All rights reserved. Teleste and the Teleste logo are registered trademarks of Teleste Corporation. Other product and service marks are property of their respective owners. Teleste reserves the right to make changes to any features and specifications of the products without prior notice. Although the information in this document has been reproduced in good faith, the contents of this document are provided "as is". Teleste makes no warranties of any kind in relation to the accuracy, reliability or contents of this document, except as required by applicable law.