

Optical Distribution Box Series - TEN-FWB4, 16F Outdoor

enlighten 16F OPTICAL DISTRIBUTION BOX

Designed for outdoor mounting this wall box allows easy connection between feeder cables and subscriber cables. The wall box is equipped with a splice tray and lock for secure fixing of box lid.

Features


- 2 inlets and 16 outlet drop ports.
- Easy to install and maintain.
- Separate tray for ease of splice connections.
- Lockable lid to avoid unauthorized access.
- High quality plastics.
- Multifunctional tray that can accommodate 1x8 and 1x16 PLC splitters.





enlighten OPTICAL PASSIVES / OPTICAL DISTRIBUTION WALL BOX SERIES

GENERAL			
Max. Input Cable Diameter	18 mm	Max. Output Cable Diameter	3 - 6 mm
Dimension (LxWxH)	300 x 235 x 100 mm	Weight	1.5 kg
Material	PC + ABS	Supported Adaptors	SC simplex, LC Duplex
Splice Trays	Features crossover points to allow reverse routing of fibres	IP Protection Class	IP 65
UV Protection	Yes	Flame Retardant	UL94
Operating Temperature	-40 - +80 °C	Colour	White (RAL9010)
Type of Installation	Wall- and Pole-mount		

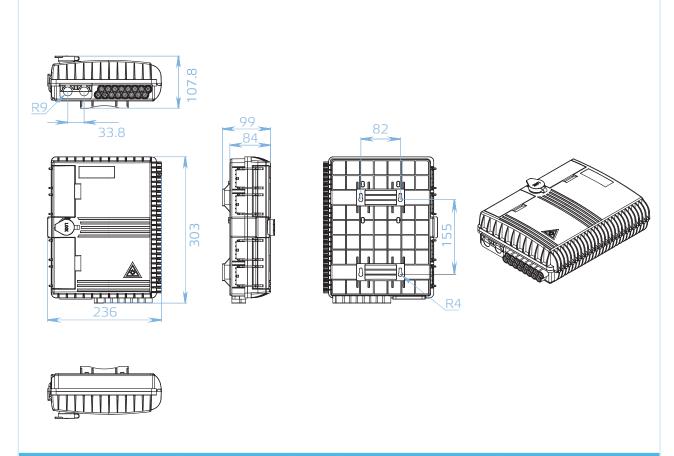

ORDERING INFORMATION		
P/N	DESCRIPTION	
TEN-FWB4-0	FTTH wall box 4 without adapters or pigtails	
TEN-FWB4-16SCA0	FTTH wall box with 16 x SC/APC adapters and no pigtails	
TEN-FWB4-16SCAP	FTTH wall box 4 with 16 x SC/APC adapters and 16 x pigtails	
TEN-FWB4-16LCA0	FTTH wall box 4 with 16 x LC/APC duplex adapters and no pigtails	
TEN-FWB4-16LCAP	FTTH wall box 4 with 16 x LC/APC duplex adapters and 32 x pigtails	



TELESTE CORPORATION www.teleste.com

Enlighten Optical Distribution Box Series TEN-FWB4_230918

Copyright © 2023 Teleste Corporation. All rights reserved. Teleste and the Teleste logo are registered trademarks of Teleste Corporation.

Other product and service marks are property of their respective owners.

Teleste reserves the right to make changes to any features and specifications of the products without prior notice. Although the information in this document has been reproduced in good faith, the contents of this document are provided "as is". Teleste makes no warranties of any kind in relation to the accuracy, reliability or contents of this document, except as required by applicable law.